

LN Series

INDOOR & OUTDOOR RENTAL LED DISPLAY

LN General Cabinet

LN-R 45°Cut-corner

LN-C S-shaped Design

The LN series rental LED display screen is easy to match and can build flexible display solutions. It is widely used in exhibition displays, concerts, conferences, sports events, and commercial activities, creating a perfect visual experience and improving information transmission efficiency.

The LN series rental LED display adopts a modular design, which is easy to install and has the advantages of convenience and high cost-effectiveness, suitable for different locations and environments. Simultaneously supporting customization based on personalized needs, integrating with other devices and systems to achieve more functions.



Light Weight


Splicing at Your Wish
(Flat/Concave&Convex/Right angle/ S shape/Circle)

Single Person Operation
(Installation and Maintenance)


Modular Design




HDR Supported



Wide Viewing Angle

LN-R DESIGNED FOR CREATIVE DISPLAY

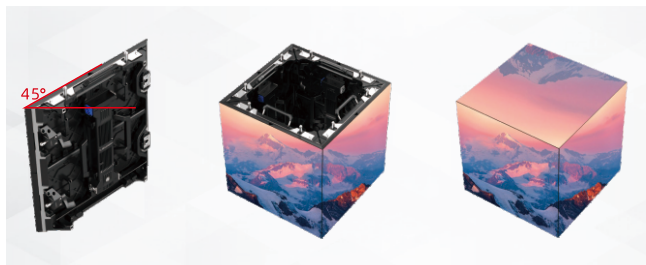


LN-C EFFICIENT S-SHAPED DESIGN



Cabinet 100% Rear Maintenance



Full Front Maintenance (customizable)



LED Module Support Front Maintenance



Radian Design, -10°~10°




LN-500x500/500x1000mm optional



LN-R



LN-C



SPECIFICATIONS

Item	LN1.9	LN2.6	LN2.9		LN3.9		LN2.9S		LN3.9S		LN4.8S	
Pixel Pitch (mm)	1.953	2.604	2.976		3.906		2.976		3.906		4.808	
Module Size (mm)(WxH)	250x250											
Module Composition (WxH)	2x2		2x4		2x2	2x4	2x2	2x4	2x2	2x4	2x2	2x4
Cabinet Resolution	256x256	192x192	168x168	168x336	128x128	128x256	168x168	168x336	128x128	128x256	104x104	104x208
Cabinet Dimension (WxHxD, mm)	500x500x79			500x1000x79	500x500x79	500x1000x79	500x500x79	500x1000x79	500x500x79	500x1000x79	500x500x79	500x1000x79
Weight (Kg/Cabinet; Kg/m²)	7.5; 30			13.5; 27	7.5; 30	13.5; 27	7.5; 30	13.5; 27	7.5; 30	13.5; 27	7.5; 30	13.5; 27
Brightness (nits)	1000						4000					
Colour Temperature, Adjustable (K)	3000~10000 Adjustable											
Viewing Angle (°)(H / V)	160/140											
Contrast Ratio	5000:1											
Power Consumption (max;avg)(W/m²)	600;200											
Power Input	AC100~240V (50~60Hz)											
Frame Rate (Hz)	50&60											
Gray Scale (bit)	14											
Refresh Rate (Hz)	≥3840 / ≥7680											
IP Level (Front / Back)	IP50						IP65					
Certi cation	International: CB, CE, CTUVUS, FCC, IC, ROHS, REACH, WEEE/Domestic: CCC, energy saving, environmental protection											

Item	LN1.9-R	LN2.6-R	LN2.9-R	LN3.9-R	LN2.9S-R	LN3.9S-R	LN4.8S-R
Pixel Pitch (mm)	1.953	2.604	2.976	3.906	2.976	3.906	4.808
Module Size (mm)(WxH)	250x250						
Module Composition (WxH)	2x2						
Cabinet Resolution	256x256	192x192	168x168	128x128	168x168	128x128	104x104
Cabinet Dimension (WxHxD, mm)	500x500x79						
Weight (Kg/Cabinet; Kg/m²)	7.5; 30						
Brightness (nits)	1000				4000		
Colour Temperature, Adjustable (K)	3000~10000 Adjustable						
Viewing Angle (°)(H / V)	160/140						
Contrast Ratio	5000:1						
Power Consumption (max;avg)(W/m²)	600;200						
Power Input	AC100~240V (50-60Hz)						
Frame Rate (Hz)	50&60						
Gray Scale (bit)	14						
Refresh Rate (Hz)	≥3840 / ≥7680						
IP Level (Front / Back)	IP50				IP65		
Certi cation	International: CB, CE, CTUVUS, FCC, IC, ROHS, REACH, WEEE/Domestic: CCC, energy saving, environmental protection						

Item	LN1.9-C	LN2.6-C	LN2.9-C	LN3.9-C	LN2.9S-C
Pixel Pitch (mm)	1.953	2.604	2.976	3.906	2.97
Module Size (mm)(WxH)	500x250				250x250
Module Composition (WxH)	1x2				2x2
Cabinet Resolution	256x256	192x192	176x168	128x128	160x168
Cabinet Dimension (WxHxD, mm)	500x500x79				
Weight (Kg/Cabinet; Kg/m²)	82;328				
Brightness (nits)	1000				4000
Colour Temperature, Adjustable (K)	3000~10000 Adjustable				
Viewing Angle (°)(H / V)	160/140				
Contrast Ratio	5000:1				
Power Consumption (max;avg)(W/m²)	600;200				
Power Input	AC100~240V (50-60Hz)				
Frame Rate (Hz)	50&60				
Gray Scale (bit)	14				
Refresh Rate (Hz)	≥3840 / ≥7680				
IP Level (Front / Back)	IP50				IP65
Certi cation	International: CB, CE, CTUVUS, FCC, IC, ROHS, REACH, WEEE/Domestic: CCC, energy saving, environmental protection				



BC Headquarter
Unit 110 , 4320 Viking Way , Richmond , BC V6V 2L4
+1 604 285 5010
innoleader.ca

ON Office
Unit 8, 6305 Northam Drive, Mississauga, Ontario L4V 1W9
+1 647-473-8688
sales@innoleader.ca